


Hydraulic Flows and Pressures

| Baumalight Part number | ISO Size | ISO tolerances | | "B" dimension | | NPT (in) |
|------------------------|----------|----------------|-------|---------------|------|----------|
| | | Min. | Max. | (mm) | (in) | |
| D001061 | 6.3 | 16.1 | 16.2 | 16 | 0.63 | 0.25 |
| D001062 | 10 | 19.66 | 19.79 | 20 | 0.79 | 0.50 |
| D001063 | 12.5 | 24.45 | 24.58 | 25 | 1 | 0.50 |
| D001064 | 16 | 26.95 | 27.08 | 27 | 1.06 | 0.75 |
| D001065 | 19 | 29.87 | 30 | 30 | 1.18 | 1.00 |
| D001066 | 25 | 35.94 | 36.07 | 36 | 1.42 | 1.00 |

All shown part numbers are male flat-face quick couplers

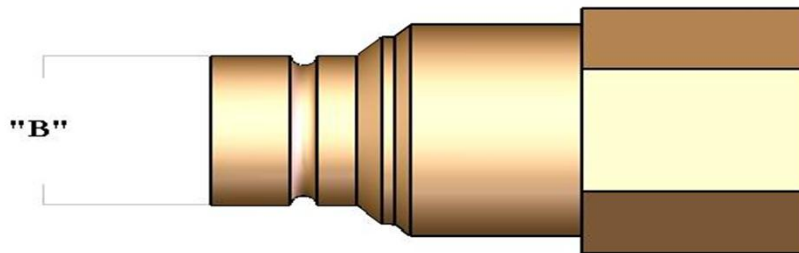

Performance will vary depending on actual hydraulic HP available
A flow and pressure test is strongly recommended before selecting attachment

Baumalight by MTB MFG INC
4575 Powell Road, Wallenstein, ON, N0B 2S0
Toll Free (866) 820-7603 Fax 519 698 1087
web www.baumalight.ca e-mail sales@baumalight.ca

Flow Test

GPM Calculation Instructions

Use this sheet to calculate the correct motor option

Run skid steer at full throttle for this test

GPM with restriction fully open

| |
|--|
| |
| |

Tank PSI with restriction fully open

Use Flow Meter to Measure Gallons Per Minute

Please fill in each psi field in the chart below until the skid steer is maxed out

PSI on pressure side

1000 2000 3000 3300 3500 4000

GPM at given psi

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

PSI on Tank side

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

Actual working psi*

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

* subtract tank psi from high pressure side.

See Mulcher Data Sheet to Choose Correct Motor Option

Please feel free to contact us for more information to help with this chart if needed.

MTB MFG INC
Wallenstein Ontario
Toll Free (866) 820-7603
Fax (519) 698-1087
sales@baumalight.com
www.baumalight.com

Excavator Flows and Pressures

Bob Cat

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 316 | | 0.76 | | 5.4 | | | | 3.70 | 2347 |
| 323 | | 1.83 | | 7.9 | | x | x | 6.22 | 2700 |
| 425 | | 2.92 | | 13.2 | | x | x | 10.05 | 2610 |
| 325 | | 3.07 | | 12.3 | | x | x | 8.97 | 2500 |
| 329 | | 3.54 | | 14 | | x | x | 10.21 | 2500 |
| 331 | | 3.59 | | 16.4 | | x | x | 12.44 | 2600 |
| 430 | | 3.94 | | 16.4 | | x | x | 12.49 | 2610 |
| 335 | | 4.58 | | 19.8 | | | x | 17.59 | 3045 |
| 435 | | 5.28 | | 19.8 | | | x | 17.59 | 3045 |
| 337 | | 5.54 | | 20 | | | x | 17.50 | 3000 |
| 442 | | 8.26 | | 26.4 | | | | 31.27 | 4060 |
| E32 | | 3.2 | | 16.9 | | | | 14.73 | 2987 |
| E35 | | 3.74 | | 16.9 | | | | 14.73 | 2987 |
| E60 | | 6.78 | | 13.9 | | | | 13.29 | 3278 |
| E80 | | 9.34 | | 31.7 | | | | 28.17 | 3046 |
| 418 | | 1.29 | | 5.3 | | | | 4.27 | 2765 |

Excavator Flows and Pressures

Case

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-----------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| CX 17 B | | 1.65 | | 4.3 | | | | 3.93 | 3133 |
| CX 27 B | | 2.52 | | 10.8 | | | | 10.51 | 3336 |
| CX 31 B | | 3.03 | | 15.5 | | | | 15.08 | 3336 |
| CX 36 B | | 3.61 | | 15.5 | | | | 15.08 | 3336 |
| CX 50 B | | 4.66 | | 15 | | | | 14.60 | 3336 |
| CX75 | | 7.9 | | 18 | | | | 22.39 | 4264 |
| CX80 | | 8.43 | | 18 | | | | 22.39 | 4264 |
| CX135 SR | | 13.44 | | 31 | | | | 44.99 | 4975 |
| CX 130 B | | 12.61 | | 34.1 | | | | 49.49 | 4975 |
| CX 160 B | | 21.5 | | 37.5 | | | | 54.42 | 4975 |
| CX 225 SR | | 24.141 | | 50.2 | | | | 72.85 | 4975 |
| CX 240 B | | 25 | | 61.8 | | | | 89.69 | 4975 |
| CX 290 B | | 29.9 | | 64 | | | | 92.88 | 4975 |
| CX 330 | | 35.4 | | 75 | | | | 108.85 | 4975 |

Excavator Flows and Pressures

Caterpillar

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|----------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 301.6C | | 1.61 | | 5.25 | | | | 4.58 | 2988 |
| 302.5C | | 2.74 | | 8.2 | | | | 7.67 | 3205 |
| 303C | | 3.79 | | 15.9 | | | | 16.47 | 3550 |
| 303.5 CR | | 3.79 | | 15.9 | | | | 16.47 | 3550 |
| CAT 304 | | 5 | | 18.5 | | | | 19.16 | 3550 |
| 305C | | 5.2 | | 18.5 | | | | 19.16 | 3550 |
| 307C | | 7 | | 33.8 | | | | 40.04 | 4061 |
| 308D | | 7.8 | | 33.8 | | | | 40.04 | 4061 |
| 311D | | 12 | | 30.9 | | | | 39.88 | 4424 |
| 312D | | 12.9 | | 33.5 | | | | 43.23 | 4424 |
| 314D | | 14 | | 32.2 | | | | 41.56 | 4424 |
| 315D | | 17.2 | | 39.6 | | | | 58.64 | 5076 |
| 319D | | 19.9 | | 46.5 | | | | 68.85 | 5076 |
| 336D | | 36.4 | | 74 | | | | 109.58 | 5076 |
| 320D | | 20.3 | | 54 | | | | 79.96 | 5076 |
| 321D | | 20.3 | | 54 | | | | 79.96 | 5076 |
| 329D | | 29.2 | | 62 | | | | 91.81 | 5076 |
| 328D | | 32.9 | | 62 | | | | 91.81 | 5076 |
| 324D | | 24 | | 58 | | | | 85.88 | 5076 |

Excavator Flows and Pressures

Gehl

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 153 | | 1.88 | | 11.1 | | | | 7.75 | 2393 |
| 223 | | 2.22 | | 11.4 | | | | 8.68 | 2611 |
| 283Z | | 2.9 | | 13.7 | | | | 11.59 | 2900 |
| 303 | | 3.119 | | 16.5 | | | | 15.71 | 3263 |
| 353 | | 3.5 | | 17.2 | | | | 17.47 | 3481 |
| 373 | | 3.726 | | 17.2 | | | | 17.47 | 3481 |
| 383 | | 3.63 | | 17.3 | | | | 14.64 | 2900 |
| 503 | | 4.8 | | 26 | | | | 25.30 | 3336 |
| 603 | | 5.7 | | 28 | 24 | 20 | x | 28.43 | 3481 |
| 753 | | 7.345 | | 19.4 | | | | 21.34 | 3771 |
| 803 | | 7.9 | | 21.8 | | | | 22.59 | 3553 |
| 1202 | | 11.5 | | 31.7 | | | | 34.86 | 3770 |

Excavator Flows and Pressures

John Deere

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|---------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 17D | | 1.89 | | 8.4 | | | | 8.22 | 3354 |
| 27DZTS | | 2.9 | | 13.9 | | | | 12.98 | 3200 |
| 35DZTS | | 3.48 | | 17.5 | | | | 18.89 | 3700 |
| 50DZTS | | 4.73 | | 22.5 | | | | 24.29 | 3700 |
| 60D | | 6.2 | | 22.5 | | | | 24.29 | 3700 |
| 75D | | 8.05 | | 13 | | | | 15.17 | 4000 |
| 85D | | 8.537 | | | | | | 0.00 | |
| 120C | | | | | | | | 0.00 | |
| 120D | | 13.082 | | | | | | 0.00 | |
| 135C | | 13.74 | | 32 | | | | 18.67 | 2000 |
| 160D | | 18.151 | | 30 | | | | 26.25 | 3000 |
| 200D | | 22.652 | | 40 | | | | 35.01 | 3000 |
| 210CW | | 20.321 | | | | | | 0.00 | |
| 225D | | 24.465 | | 40 | | | | 35.01 | 3000 |
| 240D | | 24.691 | | 58 | | | | 50.76 | 3000 |
| 270D | | 28.68 | | 62 | | | | 54.26 | 3000 |
| 17ZTS | | 1.8 | | 7.7 | | | | 0.00 | |
| 27C ZTS | | 2.94 | | 12.6 | | | | 0.00 | |
| 35C STS | | 3.525 | | 17.9 | | | | 0.00 | |
| 50C ZTS | | | | 22.5 | | | | 0.00 | |

Excavator Flows and Pressures

Hitachi

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|------------------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| <u>75US-3</u> | | 8.04 | | 20.9 | | | | 23.0 | 3771 |
| <u>85USB</u> | | 8.53 | | 20.9 | | | | 23.0 | 3771 |
| <u>120-3</u> | | 12.6 | | 27.7 | | | | 40.2 | 4980 |
| <u>135US-3</u> | | 14.13 | | 27.7 | | | | 40.2 | 4980 |
| <u>160LC-3</u> | | 17.2 | | 50.4 | | | | 73.2 | 4980 |
| <u>200LC-3</u> | | 21.3 | | 56 | | | | 81.4 | 4980 |
| <u>225USLC-3</u> | | 24.5 | | 56 | | | | 81.4 | 4980 |
| <u>240LC-3</u> | | 24.8 | | 59.2 | | | | 86.0 | 4980 |
| <u>270LC-3</u> | | 28.7 | | 62.3 | | | | 90.5 | 4980 |
| <u>350LC-3</u> | | 35 | | 76.1 | | | | 110.6 | 4980 |

Excavator Flows and Pressures

Kobelco

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|---------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 13SR | | 1.7 | | 3.9 | | | | 3.39 | 2980 |
| 27SR | | 2.5 | | 10.8 | | | | 10.51 | 3336 |
| 35SR | | 3.6 | | 15.5 | | | | 15.08 | 3336 |
| 50SR | | 4.6 | | 15.01 | | | | 14.61 | 3336 |
| 70SR | | 7.3 | | 34.9 | | | | 43.27 | 4250 |
| 80SR | | 7.8 | | 34.9 | | | | 43.27 | 4250 |
| 140SR | | 14.7 | | 34.3 | | | | 49.03 | 4900 |
| 215SR | | 24.8 | | 58.1 | | | | 83.05 | 4900 |
| 235SR | | 26.7 | | 58.1 | | | | 83.05 | 4900 |
| ED150 | | 16.3 | | 34.3 | | | | 42.52 | 4250 |
| ED195 | | 20.3 | | 37.8 | | | | 54.03 | 4900 |
| Sk170LC | | 17.2 | | 37.8 | | | | 54.03 | 4900 |
| SK210LC | | 21.7 | | 58.1 | | | | 83.05 | 4900 |
| SK260LC | | 26 | | 64.9 | | | | 92.77 | 4900 |
| SK295LC | | 30.3 | | 64.9 | | | | 92.77 | 4900 |
| SK350LC | | 36.1 | | 77.6 | | | | 110.92 | 4900 |
| SK485LC | | 50.2 | | 97.8 | | | | 139.80 | 4900 |
| SK850LC | | 80.4 | | 133 | | | | 185.69 | 4786 |

Excavator Flows and Pressures

Komatsu

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-------------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| PC09-1 | | 1 | | 5.8 | | | | 3.85 | 2275 |
| PC18MR-3 | | 2 | | 9.2 | | | | 8.96 | 3340 |
| PC27MR-3 | | 3.23 | | 13.2 | | | | 13.71 | 3560 |
| PC35MR-3 | | 3.95 | | 18.5 | | | | 20.35 | 3770 |
| PC45MR-3 | | 5.28 | | 18.5 | | | | 20.72 | 3840 |
| PC55MR-3 | | 5.69 | | 18.5 | | | | 20.72 | 3840 |
| PC78US-6 | | 7.92 | | 32.5 | | | | 36.40 | 3839 |
| PC78US-8 | | 8.21 | | 42.2 | | | | 47.27 | 3840 |
| PC88MR-8 | | 9.279 | | 42.2 | | | | 47.27 | 3840 |
| PC130-8 | | 13.85 | | 64 | | | | 86.25 | 4620 |
| PC138USC-8 | | 16 | | 64 | | | | 94.28 | 5050 |
| PC160LC-7 | | 18.5 | | 82.4 | | | | 129.80 | 5400 |
| PC160LC-8 | | 18.5 | | 82.4 | | | | 129.80 | 5400 |
| PC200LC-8 | | 23.5 | | 116 | | | | 182.73 | 5400 |
| PC228USLC-3 | | 25 | | 113 | | | | 178.00 | 5400 |

Excavator Flows and Pressures

Leibherr

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|----------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| A312 | | 14.6 | | 60 | | | | 87.51 | 5000 |
| A309 | | 12.5 | | 51 | | | | 74.39 | 5000 |
| A311 | | 13.4 | | 51 | | | | 74.39 | 5000 |
| A314 | | 16.5 | | 51 | | | | 74.39 | 5000 |
| A316 | | 18.3 | | 51 | | | | 74.39 | 5000 |
| A900 | | 19.4 | | 80 | | | | 116.69 | 5000 |
| A900 CZW | | 22 | | 50 | | | | 72.93 | 5000 |
| A904 | | 21.1 | | 50 | | | | 72.93 | 5000 |
| A914 | | 22.9 | | 57 | | | | 83.14 | 5000 |
| A924 | | 25.6 | | 57 | | | | 83.14 | 5000 |
| A934 | | 37.2 | | 65 | | | | 94.81 | 5000 |
| A944 | | 58.4 | | 80 | | | | 116.69 | 5000 |
| A954 | | 77.4 | | 92 | | | | 134.19 | 5000 |
| R313 | | 17.2 | | 78 | | | | 113.77 | 5000 |
| R317 | | 20.5 | | 78 | | | | 113.77 | 5000 |
| R900 | | 21.6 | | 80 | | | | 116.69 | 5000 |
| R906 | | 25.3 | | 56 | | | | 81.68 | 5000 |
| R916 | | 27.2 | | 56 | | | | 81.68 | 5000 |
| R924 | | 29.05 | | 56 | | | | 81.68 | 5000 |
| R926 | | 28.3 | | 63 | | | | 97.40 | 5300 |
| R944C | | 79.6 | | 80 | | | | 116.69 | 5000 |
| R954 | | | | 92 | | | | 134.19 | 5000 |

Excavator Flows and Pressures

Mustang

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|---------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| ME1503 | | 1.7 | | 6.1 | | | | 3.23 | 1813 |
| ME2203 | | 2.1 | | 6.1 | | | | 3.87 | 2175 |
| ME3003 | | 3.35 | | 9.6 | | | | 8.12 | 2900 |
| ME3503 | | 3.5 | | 11 | | | | 9.31 | 2900 |
| ME3703 | | 3.7 | | 11 | | | | 9.31 | 2900 |
| 2803ZT | | 2.6 | | 8.1 | | | | 7.06 | 2988 |
| 3803ZT | | 3.6 | | 10.6 | | | | 9.42 | 3046 |
| 5003ZT | | 4.8 | | 10.9 | | | | 9.91 | 3118 |
| 6003 | | 5.7 | | 16.9 | | | | 17.16 | 3480 |
| 8002 | | 7.96 | | 20.9 | | | 11.4 | 26.53 | 4351 |
| 8003 | | 7.9 | | 21.8 | | | | 21.32 | 3353 |
| 7506ZT | | 7.3 | | 19.4 | | | | 17.65 | 3118 |
| ME12002 | | 11.5 | | 31.7 | | | | 34.86 | 3770 |

Excavator Flows and Pressures

Toromont

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|---------------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| 307D | | 7.075 | | | | | | 0.00 | 4061 |
| 308D cr sb | | 8.4 | | | | | | 0.00 | 4061 |
| 308D CR | | 7.85 | | | | | | 0.00 | 4061 |
| 301.6C 301.8C | | 1.61 | | 5.25 | | | | 4.58 | 2988 |
| 301.8C | | 1.68 | | 5.25 | | | | 4.58 | 2988 |
| 302.5C | | 2.745 | | 8.2 | | | | 7.67 | 3205 |
| 303C | | 3.435 | | | | | | 0.00 | 3553 |
| 303.5C | | 3.79 | | | | | | 0.00 | 3553 |
| 304C | | 4.8 | | | | | | 0.00 | 3553 |
| 305C | | 5.2 | | 18.5 | | | | 19.17 | 3553 |
| 311D | | 12.4 | | 30.9 | | | | 39.88 | 4424 |
| 312D | | 12.9 | | 33.5 | | | | 43.23 | 4424 |
| 314D | | 14 | | 32.2 | | | | 41.56 | 4424 |
| 314C | | 14.8 | | 33.5 | | | | 42.41 | 4340 |
| 315D | | 17.28 | | 39.6 | | | | 58.64 | 5076 |
| 320D | | 21.5 | | 62 | | | | 91.81 | 5076 |
| 321D | | 23.53 | | 54 | | | | 79.96 | 5076 |
| 320D LRR | | 23.7 | | 54 | | | | 79.96 | 5076 |

Excavator Flows and Pressures

Takeuchi

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|--------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| TB108 | | 1 | | 5.7 | | | | 3.80 | 2288 |
| TB016 | | 1.76 | | 8.7 | | | | 7.22 | 2844 |
| TB125 | | 3 | | 12.9 | | | | 11.24 | 2987 |
| TB228 | | 3 | | 13.9 | | | | 12.16 | 3000 |
| TB135 | | 3.81 | | 15.6 | | | | 13.65 | 3000 |
| TB235 | | 3.98 | | 16.3 | | | | 14.26 | 3000 |
| TB145 | | 5.38 | | 14.8 | | | | 12.95 | 3000 |
| TB250 | | 5.33 | | 15.4 | | | | 13.48 | 3000 |
| TB175 | | 8.76 | | 18.3 | | | | 21.35 | 4000 |
| TB1140 | | 15.65 | | 28.1 | | | | 40.80 | 4977 |

Excavator Flows and Pressures

Volvo

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|----------------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| <u>EC15B</u> | | 1.4 | | 8.4 | | | | 6.0 | 2465 |
| <u>EC20C</u> | | 1.9 | | 11.4 | | | | 10.1 | 3045 |
| <u>EC35C</u> | | 3.4 | | 15.9 | | | | 16.1 | 3480 |
| <u>EC55C</u> | | 5.7 | | 15.3 | | | | 14.0 | 3133 |
| <u>ECR28</u> | | 2.5 | | 11.9 | | | | 10.6 | 3046 |
| <u>ECR38</u> | | 3.2 | | 15.9 | | | | 16.2 | 3483 |
| <u>ECR48C</u> | | 4.7 | | 26.4 | | | | 29.0 | 3770 |
| <u>ECR58</u> | | 5.9 | | 34.3 | | | | 34.9 | 3483 |
| <u>ECR88</u> | | 8.5 | | 43.8 | | | | 55.6 | 4354 |
| <u>EC140C</u> | | 12.8 | | 31 | | | | 45.0 | 4980 |
| <u>ECR145C</u> | | 14.8 | | 32.4 | | | | 44.3 | 4690 |
| <u>EC160C</u> | | 16.7 | | 32.4 | | | | 47.1 | 4980 |
| <u>EC210C</u> | | 21.3 | | 32.4 | | | | 44.3 | 4690 |

Excavator Flows and Pressures

Yanmar

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
| SV08 | | 0.8 | | 5.2 | | x | x | 3.98 | 2625 |
| VIO17 | | 1.7 | | 8.1 | | x | x | 5.71 | 2417 |
| VIO20 | | 2 | | 11.3 | | x | x | 7.97 | 2417 |
| VIO27 | | 2.7 | | 13.9 | | | x | 11.52 | 2842 |
| VIO35 | | 3.5 | | 17.4 | | | x | 15.90 | 3132 |
| VIO45 | | 4.5 | | 19.7 | | | x | 18.00 | 3133 |
| VIO55 | | 5.5 | | 21.3 | | | x | 22.08 | 3553 |
| VIO75 | | 7.5 | | 33.8 | | | x | 29.44 | 2986 |
| SV100 | | 10 | | 37.8 | | | x | 39.20 | 3555 |



www.baumalight.com
1.866.820.7603

Excavator Flows and Pressures

Manufacturer

| Model | Type | WEIGHT | WIDTH | GPM @ 1000 PSI | GPM @ 2000 PSI | GPM @ 3000 PSI | GPM @ 4000 PSI | HYD HP | Max P.S.I. |
|-------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|
|-------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|--------|------------|

1