


Hydraulic Flows and Pressures

Baumalight Part number	ISO Size	ISO tolerances		"B" dimension		NPT (in)
		Min.	Max.	(mm)	(in)	
D001061	6.3	16.1	16.2	16	0.63	0.25
D001062	10	19.66	19.79	20	0.79	0.50
D001063	12.5	24.45	24.58	25	1	0.50
D001064	16	26.95	27.08	27	1.06	0.75
D001065	19	29.87	30	30	1.18	1.00
D001066	25	35.94	36.07	36	1.42	1.00

All shown part numbers are male flat-face quick couplers

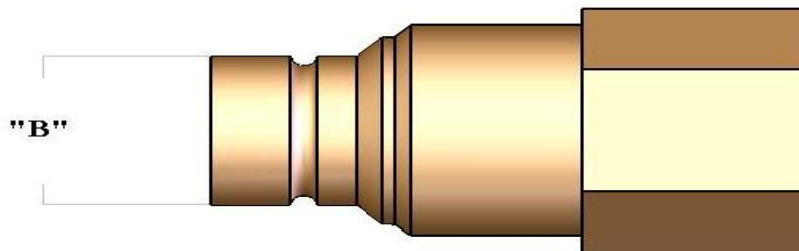

Performance will vary depending on actual hydraulic HP available
A flow and pressure test is strongly recommended before selecting attachment

Baumalight by MTB MFG INC
4575 Powell Road, Wallenstein, ON, N0B 2S0
Toll Free (866) 820-7603 Fax 519 698 1087
web www.baumalight.ca e-mail sales@baumalight.ca

Flow Test

GPM Calculation Instructions

Use this sheet to calculate the correct motor option

Run skid steer at full throttle for this test

GPM with restriction fully open

Tank PSI with restriction fully open

Use Flow Meter to Measure Gallons Per Minute

Please fill in each psi field in the chart below until the skid steer is maxed out

PSI on pressure side

1000 2000 3000 3300 3500 4000

GPM at given psi

--	--	--	--	--	--

PSI on Tank side

--	--	--	--	--	--

Actual working psi*

--	--	--	--	--	--

* subtract tank psi from high pressure side.

See Mulcher Data Sheet to Choose Correct Motor Option

Please feel free to contact us for more information to help with this chart if needed.

MTB MFG INC
Wallenstein Ontario
Toll Free (866) 820-7603
Fax (519) 698-1087
sales@baumalight.com
www.baumalight.com

Hydraulic Flows and Pressures

ASV-POSI-TRACK

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
HD4500		2837	69	19				16.6	3000
HD4500	HIGH-FLOW	2837	69	30				28.0	3200
HD4520		2837	69	19				16.6	3000
HD4520	HIGH-FLOW	2837	69	30				26.3	3000
HD4810		2950	69	19				16.4	2950
HD4810	HIGH-FLOW	2950	69	19				17.7	3200
MD-2800/2810		2350	69	19				16.6	3000
MD-2800/2	HIGH-FLOW	2350	69	25				21.9	3000
MD70		2200	60	18				15.8	3000
MD70	HI-FLO	2200	66	25				21.9	3000
PT100				20				19.3	3300
PT100	high flow			38				36.6	3300
PT80								0.0	
PT80	HIGH FLOW			30				26.3	3000
RC/R-50	CURRENT MODEL	1500	60	16.3				14.3	3000
RC100	CURRENT MODEL	3800	69	20				19.3	3300
RC-100	HIGH-FLOW	3800	69	38				36.6	3300
RC-30	CURRENT MODEL	800	46.5	10				8.8	3000
RC-60	CURRENT MODEL	1900	60	17.4				15.2	3000
RC-85	CURRENT MODEL	3400	69	20				19.3	3300
RC-85	HIGH-FLOW	3400	69	38				36.6	3300
RCV	CURRENT MODEL	4000	69	20				19.3	3300
RCV	HIGH FLOW	4000	69	38				36.6	3300
SR-70		2750	66	20				17.5	3000
SR-70		2750	66	30				28.0	3200
SR-80		3100	72	20				18.7	3200
SR-80		3100	75	30				28.0	3200

Skid Steer Flows and Pressures

Bob Cat

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
463		2708	36	9.8				8.6	3000
763		1500	66	16.7				14.6	3000
843		1700	62.4	15.5				9.6	2125
853	HI-FLO	1700	62.3	17.9				12.5	2400
863		1900	67	20.7				18.1	3000
873		3000	74	18.7				16.4	3000
963	SPECIAL MOUNT	3000	78	26.2				22.9	3000
980		4000	93	13				8.5	2250
980	HI-FLO	4000	93	38				24.9	2250
5600	TOOLCAT	1500	61	18				15.8	3000
5600	HIGH-FLO	1500	61	26				22.8	3000
7753		1700	68.3	15				13.1	3000
753H	HIGH-FLOW	1400	55	22				21.2	3300
753HC	HIGH-FLOW	1400	55	22				21.2	3300
753L		1500	68.1	15				13.1	3000
763C		1500	68.1	15				13.1	3000
763F		1500	66	15				13.1	3000
763G		1500	66	15				13.1	3000
763HC	HI-FLO	1500	68.1	25				21.9	3000
763HF	HI-FLO	1500	66	25				21.9	3000
773C		1700	68.1	15				13.1	3000
773F		1700	66	15				13.1	3000
773G		1750	66	16.7				14.6	3000
773HG	HI-FLOW	1750	66	27				23.6	3000
843B		1700	62.4	16.1				10.0	2125
843H	HI-FLO	1700	62.4	22				19.3	3000
853C		1700	61.5	18				14.7	2800
853H	HI-FLO	1700	62.3	24				23.1	3300
863C		1900	67.2	18				14.7	2800
863CH	HI-FLO	1900	67.2	28				27.0	3300
863F		1900	67.2	18				14.7	2800
863FH	HI-FLO	1900	67.2	29				27.9	3300
863G		1850	66	18.7				16.4	3000
863GH	HI-FLO	1850	66	29				25.4	3000
864G		2000	72.8	20.6				18.0	3000
864H	HI-FLO	2000	72.8	32				28.0	3000
883G	HI-FLO	2750	76.8	30.7				29.6	3300
963G	SPEC MOUNT	3000	63/78	26.2				19.1	2500
974/975		3700	83.25	13				8.5	2250
974/975	HI-FLO	3700	83.25	38				24.9	2250

Skid Steer Flows and Pressures

Bob Cat

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
A300	CURRENT MODEL	3000	74	20.7				19.9	3300
A300	HI-FLO	3000	74	37				35.6	3300
MT52	MINI-TRACK	520	36	12				0.0	
MT55	MINI-TRACK	550	44	12				0.0	
S100		1000	50	13.1				11.5	3000
S130	CURRENT MODEL	1300	54/60	16.9				14.8	3000
S150	CURRENT MODEL	1500	60/66	16.7				14.6	3000
S160	CURRENT MODEL	1600	60/66	16.7				14.6	3000
S160	HI-FLO	1600	60/66	26.4				23.1	3000
S175	CURRENT MODEL	1750	66	16.9	16			14.8	3000
S175	HI-FLO	1750	66	26.4				23.1	3000
S185	current model	1850	66	16.9				14.8	3000
S185	HI-FLO	1850	66	26.4				23.1	3000
S220	current model		72	20.7				19.9	3300
S220	HI-FLO		72	37				35.6	3300
S300		3000	72	20.7				18.1	3000
S300	HI-FLO	3000	72	30.7				26.9	3000
S300	CURRENT MODEL	3000	72	20.7				18.1	3000
S300	HI-FLO	3000	72	37				32.4	3000
S330	CURRENT MODEL	3300	72	20.7				18.1	3000
S330	HI-FLO	3300	72	37				32.4	3000
T140	CURRENT MODEL	1400	54/60	16.9				14.8	3000
T140		1400	56	16.9				0.0	
T180	CURRENT MODEL	1800	66	16.3				14.3	3000
T180	HI-FLO	1800	66	25.5				22.3	3000
T190	CURRENT MODEL	1900	66	16.3				15.7	3300
T190	hi-flo	1900	66	25.5				24.5	3300
T190G		1900	66	16.9				14.8	3000
T190G	HI-FLO	1900	66	26.4				23.1	3000
T300	CURRENT MODEL	3000	78	21.2				20.4	3300
T300	HI-FLO	3000	78	37				35.6	3300
T300G		3000	78	18.7				18.0	3300
T300G	HI-FLO	3000	78	29.2				28.1	3300
T320	TRACK	3200	80	37				37.8	3500
V330		4087	72	21.8				21.9	3450
V330	Hi-flo	4087	72	36.3				36.5	3450
V272		3629	69.5	21.75				21.3	3350
V272	HI-FLO	3629	69.5	36.9				36.1	3350

Skid Steer Flows and Pressures

Case

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
410	CURRENT MODEL	1500	59	18				15.8	3000
420	CURRENT MODEL	1750	59	18				15.8	3000
420	HI-FLO	1750	59	31				27.1	3000
430	CURRENT MODEL	2000	64	21				18.4	3000
430	HI-FLO	2000	64	31				27.1	3000
435	CURRENT MODEL	2300	72	21				18.4	3000
435	HI-FLO	2300	72	32.1				28.1	3000
440	CURRENT MODEL	2200	64	21				18.4	3000
440	hi-flo	2200	64	31				27.1	3000
445	CURRENT MODEL	2500	72	21				18.4	3000
445	HI-FLO	2500	72	33.7				29.5	3000
450	current Model	2450	72	22.1				19.3	3000
450	Hi-Flo	2450	72	37.2				32.6	3000
465	CURRENT MODEL	3000	72	22.1				19.3	3000
465	HI-FLO	3000	72	37.2				32.6	3000
1835		1200	59.5	11				7.4	2300
1838		1300	59.9	15.8				10.6	2300
1840		1400	59.9	15.3				10.3	2300
1840	HI-FLO	1400	59.9	30				20.1	2300
1835B		1200	59.9	15.5				10.4	2300
1835C		1250	59.9	16.4				11.0	2300
1835C		1200	59.9	15.5				10.4	2300
1845B		1700	72	16.8				11.3	2300
1845B		1700	72	16.8				11.3	2300
1845C		1750	72	16				10.7	2300
1845C	HI-FLO	1750	72	30				20.1	2300
1845S		1700	72	16.8				11.3	2300
40XT		1500	60	19.1				16.7	3000
40XT	HI-FLO	1500	60	32				28.0	3000
445CT	TRACKS	2450	80.6	22.1				19.3	3000
450CT	HI-FLO	2450	80.6	37.2				32.6	3000
450CT	Tracks	2450	82.6	22.1				19.3	3000
450CT	HI-Flo	2450	82.6	37.5				32.8	3000
60XT		1800	72	21				18.4	3000
60XT	HI-FLO	1800	72	30				26.3	3000
70XT		2000	72	21				18.4	3000
70XT	HI-FLO	2000	72	31				27.1	3000
75XT		2200	71.1	19.1				15.3	2750
75XT	HI-FLO	2200	71.1	32				28.0	3000
85XT		2400	72-82	20				17.5	3000

Skid Steer Flows and Pressures

Case

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
85XT	HI-FLO	2400	72-82	38				33.3	3000
90XT		2450	72-82	20				17.5	3000
90XT	HI-FLO	2450	72-82	40				35.0	3000
90XT	HI-FLO	2450	72-82	30				43.8	5000
95XT		3150	72-82	22.8				20.0	3000
95XT	HI-FLO	3150	72-82	40				35.0	3000
95XT	HI-FLO	3150	72-82	30				43.8	5000

Skid Steer Flows and Pressures

Caterpillar

Model	Type	WEIGHT	WIDTH	GPM @	GPM @	GPM @	GPM @	HYD HP	Max P.S.I.
				1000 PSI	2000 PSI	3000 PSI	4000 PSI		
216		1350	60	15				13.6	3100
216B	CURRENT MODEL	1400	60	15.6				14.1	3100
216B	Series 2	1400	60	15.6				15.2	3335
216B	Series 3	1400	60	16				15.6	3335
226		1500	60	15				14.4	3300
226B	CURRENT MODEL	1500	60	15.6				15.2	3335
226B	Series 2	1500	60	26				25.3	3335
226B	Series 3	1500	60	27				26.3	3335
226BF	HI-FLO	1500	60	26				25.3	3335
228	HI-FLO	1500	60	30				28.9	3300
232		1750	60	14.7				13.3	3100
232B	CURRENT MODEL	1750	66	15.6				14.1	3100
232B	Series 2	1950	66	22				21.4	3335
236		1750	66	22				21.2	3300
236B	CURRENT MODEL	1750	66	22				21.4	3335
236B	Series 2	1950	66	22				21.4	3335
242		2000	66	15.1				14.5	3300
242B	CURRENT MODEL	2000	66	15.6				15.2	3335
242B	Series 2	2100	66	26				25.3	3335
242B	Series 3	2150	66	22				21.4	3335
242BF	HI-FLOW	2000	66	26				25.3	3335
246		2000	72	22				21.2	3300
246C		2150	66	33				32.1	3335
246B	CURRENT MODEL	2000	66	22				21.4	3335
247B	TRACKS	1950	66	15.6				15.2	3335
248	low-flo							0.0	
248	HI-FLO	2000	66	33				40.4	4200
248B	HI-FLO	2000	66	32.5				38.5	4060
252		2250	66	22				21.2	3300
252B	CURRENT MODEL	2250	72	22				21.4	3335
252B	Series 2	2500	72	22				21.4	3335
252B	Series 3	2650	72	22				21.4	3335
256C		2350	66	33				32.1	3335
257	TRACKS	2300	66	15				14.4	3300
257B	TRACKS	2310	66	15.6				15.2	3335
257BF	HI-FLO	2324	66	26				25.3	3335
262		2500	66	22				21.2	3300
262B	CURRENT MODEL	2500	72	22				21.4	3335
262C		2700	66	33				32.1	3335
267B	TRACKS	2900	75	22				21.4	3335

Skid Steer Flows and Pressures

Caterpillar

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
268B	HI-FLO	2500	72	33				39.1	4060
272C		3250	66	33				32.1	3335
277	TRACKS	2950	75	22				21.2	3300
277B	TRACKS	2950	75	22				21.4	3335
277C		3200	78	22				21.4	3335
287B	TRACKS	3600	77	22				21.4	3335
287C		3800	78	22				21.4	3335
287BF	HI-FLO	3600	77	33				39.1	4060
297C		4200	78	33				32.1	3335
4640E	CURRENT MODEL	1500	63.5	19				15.2	2750
4640DX	HI-FLO	1500	63.5	30				24.1	2750
4835		1625	62	19				15.2	2750
4835DX	HI-FLO	1625	62	30				24.1	2750
4840E	CURRENT MODEL	1700	63.5	19				15.2	2750
4840E	HI-FLO	1700	63.5	30				24.1	2750
5240	low			19				15.2	2750
5620		1700	67	20				13.4	2300
5625		1700	67	20				14.6	2500
5625DX	HI-FLO	1700	67	33				24.1	2500
5635		1800	66	20				16.0	2750
5635DX	HI-FLO	1800	66	33				26.5	2750
5635 11		1900	66	23				18.5	2750
5635DX 11	HI-FLO	1900	66	36				28.9	2750

Skid Steer Flows and Pressures**Daewoo**

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
430	CURRENT MODEL	1450	58.5	11.8				8.7	2538
430	HI-FLO	1450	58.5	25.9				19.2	2538
440	CURRENT MODEL	1850	58.5	15.8				13.8	3000
440	HI-FLO	1850	58.5	27.5				24.1	3000
450	CURRENT MODEL	1950	65.4	21.7				19.0	3000
450	HI-FLO	1950	65.4	32.3				28.3	3000
460	CURRENT MODEL	2000	65.4	21.7				19.0	3000
460	HI-FLO	2250	65.4	32.3				28.3	3000
1340XL		1300	58.5	11.9				8.6	2480
1340XL	HI-FLO	1300	58.5	26.7				19.3	2480
1550XL		1500	58.5	16				14.0	3000
1550XL	HI-FLO	1500	58.5	26.7				23.4	3000
1760XL		1700	65.4	18.2				13.2	2480
1760XL	HI-FLO	1700	65.4	30				26.3	3000
2060XL		2000	65.4	20.5				17.9	3000
2060XL	HI-FLO	2000	65.4	30				26.3	3000
DSL 601		1300	58.5	11.9				8.8	2540
DSL 601	HI-FLO	1300	58.5	26.7				19.8	2540
DSL 801		1700	65.4	18.2				13.2	2480
DSL 801	HI-FLO	1700	65.4	31.7				22.9	2480

Skid Steer Flows and Pressures

Gehl

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
3635		1050	48	14.4				11.6	2750
3725		950	54	10				7.3	2500
3825		1000	54	10.9				7.9	2500
3935		1260	51.9	14.4				10.9	2600
4525		1250	62.5	16.5				11.6	2400
4610		1150	63	16				14.0	3000
4625		1350	62	18				11.3	2150
4635		1425	62	20.5				16.4	2750
4835		1625	62	19				15.2	2750
5240	low			19				15.2	2750
5620		1700	67	20				13.4	2300
5625		1700	67	20				14.6	2500
5635		1800	66	20				16.0	2750
6620		2050	69	23				16.1	2400
6625		2050	69	23				16.8	2500
6635		2300	66	23				18.5	2750
7600		3150	79.5	29				27.9	3300
7610		3400	81	29				27.9	3300
7800		3600	79.5	29				27.9	3300
7800	HI-FLO	3600	79.5	40				38.5	3300
3640E	CURRENT MODEL	1050	48	14.5				11.6	2750
4240E	CURRENT MODEL	1350	62	18				11.3	2150
4625DX	HI-FLO	1350	62	28				17.6	2150
4635DX	HI-FLO	1425	62	34.8				27.9	2750
4640DX	HI-FLO	1500	63.5	30				24.1	2750
4640E	CURRENT MODEL	1500	63.5	19				15.2	2750
4835DX	HI-FLO	1625	62	30				24.1	2750
4840E	CURRENT MODEL	1700	63.5	19				15.2	2750
4840E	HI-FLO	1700	63.5	30				24.1	2750
5625DX	HI-FLO	1700	67	33				24.1	2500
5635 11		1900	66	23				18.5	2750
5635DX	HI-FLO	1800	66	33				26.5	2750
5635DX 11	HI-FLO	1900	66	36				28.9	2750
5640E	HI-FLO	2000	67	36				31.5	3000
6625DX	HI-FLO	2050	69	33				24.1	2500
6635 II		2300	66	23				18.5	2750
6635 II		2350	66	22				17.6	2750
6635DX	HI-FLO	2300	66	33				26.5	2750
6635DX II	HI-FLO	2350	66	36				28.9	2750
6635DXII	HI-FLO	2300	66	33				26.5	2750

Skid Steer Flows and Pressures

Gehl

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
6640E	CURRENT MODEL	2400	67	23				20.1	3000
6640E	HI-FLO	2400	67	36				31.5	3000
7810E	CURRENT MODEL	3675	81	29				27.9	3300
7810E	HI-FLO	3675	81	36				34.7	3300
CTL60	CURRENT MODEL	2315	62.2	18				15.7	2988
CTL60	CURRENT MODEL	2315	62.2	18				15.7	2988
CTL70	CURRENT MODEL	2976	69.7	19.8				17.3	2988
CTL70	High Flow	?	?	36.3				31.6	2988
CTL80	CURRENT MODEL	3528	73.2	23.4				20.4	2988
CTL80	HI-FLOW	3528	73.2	39.6				34.5	2988

Skid Steer Flows and Pressures

New Holland

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
C175	TRACKS	2000	70.8	17.2				13.0	2600
C175	HI-FLO	2000	70.8	30.3				23.0	2600
C185	TRACKS	2500	30.4/82.4	19.3				16.9	3000
C185	HI-FLO	2500	30.4/82.4	34.7				30.4	3000
C190	TRACKS	2800	30.4/82.4	21.9				19.2	3000
C190	HI-FLO	2800	30.4/82.4	37.4				32.7	3000
L 170	low flow			17.1				12.5	2500
L 170	HI-FLO	1765	64.7	24.5				18.6	2600
L 175		2000	70.8	17.2				13.0	2600
L 175	HI-FLO	2000	70.8	30.3				23.0	2600
L 180		2200	71.3	19.3				16.9	3000
L 180	HI-FLO	2200	71.3	34.7				30.4	3000
L185		2550	71.3	19.3				16.9	3000
L185	HI-FLO	2550	71.3	34.7				30.4	3000
L190		2800	72/76.4	21.9				19.2	3000
L190	HI-FLO	2800	72/76.4	37.3				32.6	3000
L555		1700	62.75	13.5				7.5	1900
LS 170	HI-FLO	1750	64.7	26.2				19.9	2600
LS 180		2200	71.3	18.5				14.0	2600
LS 180	HI-FLO	2200	71.3	32.3				24.5	2600
LS 185B		2500	71.3	19.3				14.6	2600
LS 185B	HI-FLO	2500	71.3	34.7				26.3	2600
LS 190		2842	76.4	20				15.2	2600
LS 190B		2800	72/76.4	21.9				16.6	2600
LS 190B	HI-FLO	2800	72/76.4	37.3				28.3	2600
LS/L 160		1750	64.7	15.5				11.8	2600
LS/L150		1282	58.6	11.9				9.0	2600
LS/L40		1282	58.6	10.8				8.2	2600
LS190	HI-FLO	2842	76.4	33.8				25.6	2600
LT 190B	TRACKS	2800	30.4/82.4	21.9				16.6	2600
LT 190B	HI-FLO	2800	30.4/82.4	37.3				28.3	2600
LT185B	Tracks	2500	82.4	19.3				14.6	2600
LT185B	HI-FLO	2500	82.4	34.7				26.3	2600
LX485		1350	60	11.9				8.7	2500
LX565		1500	65.6	14.5				10.6	2500
LX665		1700	65.6	17.1				12.5	2500
LX665	HI-FLO	1700	65.6	25				18.2	2500
LX865		2200	71.9	17.9				13.1	2500
LX885	HI-FLO	2200	71.9	30				21.9	2500
LX985		2800	72	20				14.6	2500
LX985	HI-FLO	2800	72	34				24.8	2500

Skid Steer Flows and Pressures**JCB**

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
160		1322	54	14.5				11.3	2683
160	HI-FLO	1322	54	30.4				23.8	2683
165		1433	59	12.4				9.7	2680
170		1543	63	15.9				12.4	2683
185		1874	67	37				34.5	3200
190		1984	67	16.7				13.1	2683
1105		2300	67	20				18.7	3200
1110		2425	67	16.7				13.1	2683
1105HF	HI-FLO	2300	67	37				34.5	3200
1110HF	HI-FLO	2425	67	32				25.0	2683
165HF	HI-FLO	1433	59	26				18.2	2400
170HF	HI-FLO	1543	63	30.4				23.8	2683
185HF	HI-FLO	1874	67	37				34.5	3200
190HF	HI-FLO	1984	67	32				29.9	3200

Skid Steer Flows and Pressures

John Deere

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
313		2336	59	15				15.1	3450
315		2359	59	16				16.1	3450
317	CURRENT MODEL	1750	64.1	17				17.1	3450
317	Hi-flo	1750	64.1	27				27.2	3450
320	CURRENT MODEL	1950	69.8	19				19.1	3450
320	HI-FLO	1950	69.8	31				31.2	3450
325	CURRENT MODEL	2500	73.7	22				19.9	3100
325	HI-FLO	2500	73.7	34				30.7	3100
328	CURRENT MODEL	3175	76.1	22	22	15		19.9	3100
328	HI-FLO	2750	76.1	36				32.6	3100
332	CURRENT MODEL	3175	77.1	24				21.7	3100
332	HI-FLO	3175	77.1	41				37.1	3100
6675		1670	65.6	15				13.6	3100
6675	HI-FLO	1670	65.6	25				19.3	2650
7775		1705	65.6	17				13.1	2650
8875		2352	71.9	17.9				13.6	2600
8875	HI-FLO	2400	76.2	33.1				31.9	3300
240/240 II		1500	63.7	14.6				13.2	3100
240/240 II	HI-FLO	1500	63.7	25.4				23.0	3100
250/250 II		1750	69.9	17.6				15.9	3100
250/250 II	HI-FLO	1750	69.9	30.1				27.2	3100
260/260 II		2400	76.2	21.3				19.3	3100
260/260 II	HI-FLO	2400	76.2	33.1				29.9	3100
270/270 II		2800	76.2	21.3				19.3	3100
270/270 II	HI-FLO	2800	76.2	34.9				31.6	3100
280/280 II		3200	77.2	22				19.9	3100
280/280 II	HI-FLO	3200	77.2	36				32.6	3100
318D	STD	2926	63	18				16.3	3100
318D	OPT	2926	63	27				24.4	3100
319D	Track	3878	72	15.5				14.0	3100
320D	STD	2994	69	20				18.1	3100
320D	OPT	2994	69	31				28.0	3100
326D	STD	3686	73	21				21.1	3450
326D	OPT	3686	73	33				33.2	3450
328D		3810	77	21				21.0	3420
329D	Track	4912	79	21				21.1	3450
332D		4160	78	25				25.2	3450
675B		1700	62.8	15.8				8.6	1875
CT322	TRACKS	2200	69.8	19				19.1	3450
CT322	HI-FLO	2200	69.8	29				29.2	3450

Skid Steer Flows and Pressures

John Deere

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
CT332	CURRENT MODEL	3175	77.1	24				21.7	3100
CT332	HI-FLO	3175	77.1	41				37.1	3100

Skid Steer Flows and Pressures

Komatsu

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
SK815-5		5785	68	16				14.2	3045
SK820-5		6480	68	16				14.2	3045
SK1020-5		7573	74	21				18.7	3045
SK1026-5		8068	74	21				18.7	3045

Skid Steer Flows and Pressures

Kubota

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
SVL75	Rubber Track	8157	58	18.8				19.5	3555
SVL90	Rubber Track	10141	80.7	23.6				24.5	3555
SVL90	High Flow	10141	80.7	35.1				36.4	3555

Skid Steer Flows and Pressures**Mustang**

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
940		1350	54/58.5	18				12.6	2400
960		1700	61/66	18				12.6	2400
960	HI-FLO	1700	61/66	25				21.9	3000
2022	CURRENT MODEL	1050	48.3	14.4				11.6	2750
2032	CURRENT MODEL	1250	48.3	14.4				11.6	2750
2040		1300	54/58.5	17				12.4	2500
2042		1350	54/58.5	18				13.1	2500
2044	Current Model	1450	58.8	18				13.1	2500
2050		1550	60.4	18.5				16.2	3000
2050	HI-Flo	1650	60.4	28				24.5	3000
2054	Current Model	1650	60.4	18				15.8	3000
2054	HI-flo	1650	60.4	28				24.5	3000
2060		1750	61/66	22				19.3	3000
2060	HI-FLO	1750	61/66	30				26.3	3000
2064		1900	66.5	22				16.0	2500
2064	HI-FLO	1900	66.5	30				21.9	2500
2066	CURRENT MODEL	2000	67.3	21.3				18.6	3000
2070		2100	70.8	22				19.3	3000
2070	HI-FLO	2100	70.8	37.5				32.8	3000
2074		2250	66.5	22				16.0	2500
2074	HI-FLO	2250	66.5	30				21.9	2500
2076	CURRENT MODEL	2200	67.3	21.3				18.6	3000
2076	HI-FLO	2200	67.3	33.5				29.3	3000
2086	CURRENT MODEL	2600	67.3	21.3				18.6	3000
2086	HI-FLO	2600	67.3	36				31.5	3000
2095		3150	79.5	29				27.9	3300
2099	CURRENT MODEL	3450	79.5	29				27.9	3300
2105		3600	79.5	29				27.9	3300
2105	HI-FLO	3600	79.5	36				34.7	3300
2109	CURRENT Model	3675	81	29				27.9	3300
2109	HI-FLO	3675	81	36				34.7	3300
MLT-16	TRACKS	2315	62.2	18				15.8	3000
MLT-25	TRACKS	3528	73.2	23.9				20.9	3000
MLT-25	HI-FLO	3528	73.2	39.6				34.5	2988

Skid Steer Flows and Pressures

Takeuchi

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
TL126		1313	60.2	17.4			15.2	15.2	2986
TL130		1620	62.2	18			15.7	15.7	2986
TL140		2083	69.6	19.8			17.3	17.3	2988
TL150		2470	73.2	23.4			20.4	20.4	2986
TL220		6215	57.9	15				13.1	3000
TL240		10115	69.7	36.3				31.8	3000
TL250		11630	73.2	40				35.0	3000
TW50		8708	65	15.9				15.5	3336
TW60		10251	65	15.9				15.5	3336
TW65		10582	73.5	15.8				17.7	3844
TW80		12677	81	18.5				21.9	4061

Skid Steer Flows and Pressures

Terex

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
PT-100		4.6 T	69"	20				19.3	3300
PT-100	Hi-Flo	4.6 T	69"	38				36.6	3300
PT-30		1.6T	48"	10				8.8	3000
PT-50		2.8T	60"	16.3				14.3	3000
PT-60		2.8T	66	17.4				15.2	3000
PT70	Hi-flo	3.5T	66	30				26.3	3000
PT-70		3.5T	66	17.4				15.2	3000
PT-80		4.1T	70	17.4				15.2	3000
PT-80	Hi-flo	4.1T	70	30				26.3	3000

Skid Steer Flows and Pressures

Thomas

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
85	CURRENT MODEL	850	35.75	8.7				5.5	2150
95		900	47.75	8.7				5.5	2150
105	CURRENT MODEL	1000	50.75	8.7				5.5	2150
105	HI-FLO	1000	50.75	8.7				5.5	2150
175	CURRENT MODEL	1750	68	16.6				11.6	2400
205	CURRENTMODEL	2250	70.8	20				17.5	3000
225		2250	70.8	16				14.0	3000
250	CURRENT MODEL	2500	70.8	21				18.4	3000
250	HI-FLO	2500	70.8	40				35.0	3000
255	CURRENT MODEL	2500	70.8	21				18.4	3000
255	HI-FLO	2500	70.8	40				35.0	3000
1300	CURRENT MODEL	1300	53	15.8				11.1	2400
1700	CURRENT MODEL	1700	68	16.6				11.6	2400
2200		2200	70.8	20.5				17.9	3000
135S		1300	53	14.5				10.2	2400
153S	CURRENT MODEL	1500	57.5	16.6				11.6	2400
245HDK		2400	70.8	20.5				17.9	3000
245HDK	HI-FLO	2400	70.8	38				33.3	3000
T103		1000	53	10.2				6.4	2150
T103S		1000	47.8	8.7				5.5	2150
T115		1100	39	8.7				5.5	2150
T133S		1300	53	15.8				11.3	2450
T137	CURRENT MODEL	1300	53	16.6				11.6	2400
T173		1700	57.5	20.5				14.7	2450
T173HL		1700	64.1	15.8				11.3	2450
T173HL	HI-FLO	1700	64.1	28.2				20.2	2450
T203		2000	63	20.5				14.7	2450
T233		2300	68.5	20.5				14.7	2450
T243HDS		2400	70.5	20.5				14.7	2450
T245HDS		2400	70.8	20.5				17.9	3000
T245HDS	HI-FLO	2400	70.8	38				33.3	3000
T320	TRACKS	2500	70.8	21				18.4	3000
T320	HI-FLO	2500	70.8	40				35.0	3000
T83		800	36	7				4.3	2100
T83S		800	35.75	8				4.9	2100
T95S		900	36	8				4.9	2100

Skid Steer Flows and Pressures

Volvo

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
MC60		1350	59.3	16.6				12.1	2500
MC70		1500	65.4	16.6				12.1	2500
MC70	HI-FLO	1500	65.4	30.6				22.3	2500
MC80		1750	71.9	20.3				16.0	2700
MC80		1750	71.9	20.3				16.0	2700
MC90		2000	71.9	17.9				14.1	2700
MC90	HI-FLO	2000	71.9	27.9				22.0	2700
MC110		2300	71.9	20.3				16.0	2700
MC110	HI-FLO	2300	71.9	27.6				21.7	2700



www.baumalight.com
1.866.820.7603

Skid Steer Flows and Pressures

Manufacturer

Model	Type	WEIGHT	WIDTH	GPM @ 1000 PSI	GPM @ 2000 PSI	GPM @ 3000 PSI	GPM @ 4000 PSI	HYD HP	Max P.S.I.
-------	------	--------	-------	-------------------	-------------------	-------------------	-------------------	--------	------------